Garden Speaker



GSS-G & GST-G





Features

- Downward Firing Speaker Will Not Collect Dust or Condensation
- Rugged Construction Can Support Up To 250 lbs
- Easy Bayonet Attachment of Head Unit To Base, Enables Installation of Base During Excavation and Installation of Head Unit After Landscaping Has Been Completed
- Switch Selectable 70.7V Input or Direct 8Ω Input (Transformer Bypass)
- Easy Conduit Installation in Tall and Short Base With Dedicated Mounting Pads
- Speaker Protected By Triple Layer Grille
- Short Base (GSS-G) has Drill Points for 4" Square, 2-Gang EO Box, or 1-Gang Box Mounting to a Deck or Slab

Application

The Atlas Sound garden speakers, designed for theme parks, hotels, or any architecturally landscaped area, simplify installation and deliver deep, rich sound.

General Description

The speaker is a coaxial 8", polypropylene/kevlar cone with rubber surround, 1.5" voice coil, 21 oz. magnet and a 1/2" mylar dome tweeter. The Atlas Sound garden speakers are designed to blend into any environment. They are available with two different base models. One model includes a short base for surface mounting and the other has a tall base for in-landscape burial. The two-piece design allows for a two-phase installation. In phase one, the base is installed. Phase two, after initial construction is done, the system contractor can return to install the speaker/transformer. This multiple step process protects the speakers from being damaged during the construction/landscaping process and also eliminates the potential for theft from the construction site. The Garden Speaker base even has a protective cover to keep debris out during construction. Inside the enclosure is a durable 8" coaxial speaker with a great sounding 360-degree horizontal dispersion pattern. The enclosure is made of stable polyethylene, which ensures performance in even the most temperamental and unpredictable climates. The enclosure is available in green finish.

Specifications

Frequency Response 43Hz - 20kHz (±7dB)

Sensitivity (1W / 1M) 89.5dB (Half Space Reference)

Power Handling 70 Watts RMS

Horizontal Dispersion 360°

Coaxial 8", Polypropylene / Kevlar Cone with Speaker

> Rubber Surround, 1/2" Mylar Dome Tweeter, 11/2" Voice Coil, 21oz Magnet

8, 16, & 32 Watts, with an External Switch for Transformer

Tap Selection and for Bypassing Transformer


Dimensions

Tall Base Width 17%" (448mm) Tall Base Length 17%" (448mm) Tall Base Height 20%" (531mm) Short Base Diameter 151/8" (384mm) Short Base Height 131/8" (334mm) Head Unit Weight 13.2 lbs (5.99Kg) Short Base Weight 2.4 lbs (1.09Kg) Tall Base Weight 6.4 lbs (2.9Kg)



Architect & Engineer Specifications

The outdoor landscape speaker shall be Atlas Sound Model GSS-G, GST-G or approved equal. The speaker shall have a downward firing 8" coaxial speaker with a 360° degree dispersion pattern. The loudspeaker speaker shall have externally adjustable taps at 8, 16, and 32 watts with a 70.7V input or 8Ω input impedance configuration. The loudspeaker shall have a separate base component so that the landscaping or construction wiring stage can be completed before mounting the loudspeaker/transformer unit. The loudspeaker base shall have conduit mounting positions and access for 4", one or two gang E.O. box attachment (short base model GSS-G only) shall be provided. Anchor holes integral to base platform (tall base model GST-G only) shall be provided.

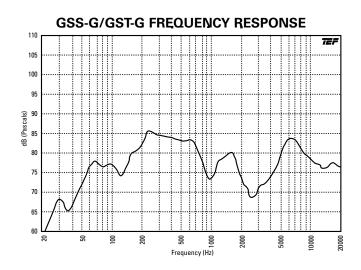

GSS-G/GST-G POLARS

