# FreeSpace® 3 Series I Acoustimass® bass module



## **Key Features**

- Low-frequency loudspeaker featuring one 5.25" (133mm) woofer that delivers deep, non-localized bass down to 40 Hz without audible distortion. For surface-mount applications
- Acoustimass speaker technology filters out audible distortion to deliver non-localized bass
- Designed to work with the FreeSpace 3 surface and flush satellite speakers, or existing systems where additional bass reinforcement is desired
- Module design allows parallel connection of multiple bass modules and can accommodate two or four FreeSpace 3 satellites per bass module
- Selectable 70/100V or low impedance



#### **Product Overview**

The Bose® FreeSpace 3 Series I Acoustimass bass module is designed to provide surface-mount bass augmentation for new and existing background music systems. It features one 5.25" (133 mm) woofer that delivers deep bass down to 40 Hz without audible distortion.

### **Technical Specifications**

System Performance	
Frequency Response (+/-3 dB) <sup>1</sup>	50 Hz - 230 Hz
Frequency Range (-10 dB) <sup>1</sup>	40 Hz - 315 Hz
Nominal Dispersion	Omni-directional below 200 Hz
Recommended High-Pass Filter	40 Hz high-pass filter
Loudspeaker EQ	Recommended
Overload Protection	PTC
Long-Term Power Handling <sup>2</sup>	70/100 V: 200 W (800 W peak) mono Low impedance: 50 W (200 W peak) per channel stereo or 100 W (400 W peak) mono
Sensitivity (SPL / 1 W @ 1 m) <sup>3</sup>	Per channel: 76 dB SPL (Mono: 79 dB SPL)
Maximum SPL @ 1 m <sup>4</sup>	Per channel: 96 dB SPL (102 dB SPL peak) Mono: 102 dB SPL (108 dB SPL peak)
Nominal Impedance	$5~\Omega$ mono direct (transformer bypassed)
Transformer Taps (70/100 V)	25 W, 50 W, 100 W, 200 W
Transducers	
Driver Compliment	5.25" (133 mm) dual voice coil low frequency driver
Physical	
Enclosure	High-density wood composite with solid color PVC laminate
Environmental	Indoor use only
Connectors	Screw terminal
Suspension / Mounting	Wall bracket included (attached to module)
Dimensions	14.0" H x 7.5" W x 13.5" D (356 mm x 191 mm x 342 mm) Width, bracket attached: 8.8" (222 mm)
Net Weight	17.5 lb (7.9 kg) - with bracket
Shipping Weight	25.0 lb (11.3 kg)
Product Code	
Black	040146
White	040145

#### Footnotes:


- 1 Frequency response and range measured on-axis with recommended active EQ in an anechoic environment
- 2 Power handling tested using pink noise filtered to meet IEC 268-5, 6 dB crest factor, 100 hours, with recommended EQ.
  3 Sensitivity measured in free field (no boundary-loading gain) with recommended active EQ, referenced to 1W/1m.
  4 Maximum SPL calculated from sensitivity and power handling specifications, exclusive of power compression.



# FreeSpace® 3 Series I Acoustimass® bass module



# **Mechanical Diagrams**

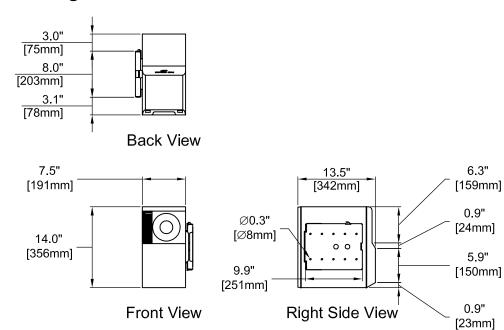

# FreeSpace® 3 Series I Acoustimass® bass module



## Architects' and Engineers' **Specifications**

The low-frequency loudspeaker module shall be a 200 watt ported loudspeaker containing one 5.25" (133 mm) dual voice coil lowfrequency driver. The module shall have an input impedance of 5 ohms for direct connection to unequalized low impedance amplifier sources. Jumper wires shall integrate the multi-tap transformer for use of the loudspeaker in 70V or 100V systems. The transformer shall offer multiple taps of 25, 50, 100, and 200

The input connector shall consist of a spring-type barrier connector for the 70/100V inputs, and a screw-type barrier strip for direct 4-8 ohm input. Wire jumpers for transformer settings shall be provided. The input panel shall be preconfigured for 70/100V, 200 watts mono operation. A removable rear connections cover shall shield all input and jumper connections. The enclosure shall be composed of high-density wood composite with solid color PVC laminate, black or white.

The loudspeaker shall be called the Bose® FreeSpace® 3 Acoustimass® module.

All information subject to change without notice.

® 2012 Bose Corporation
All trademarks are those of their respective owners.

